



BLUETOOTH® WIRELESS
TECHNOLOGY DEVICES FOR
INSTALLATION IN LUMINAIRES



BLUETOOTH® WIRELESS DALI-CONTROLLER WITH BLUETOOTH-DALI-CONNECTIVITY

Blu2Light – The intelligent wireless lighting control solution

Blu2Light is the first completely open Bluetooth® wireless technology system with mesh functionality for the professional lighting market, which, in addition to a variety of functions for lighting control, offers the luminaire manufacturer added IoT benefits with maximum system security.

Connect ME / MEC

DALI-Controller with Bluetooth® wireless technology

Blu2Light Connect ME / MEC


- **CONFIGURATION VIA LINA CONNECT APP**
- **CONTROL VIA LINA TOUCH APP**
- **CONNECTION OF UP TO 64 DALI DRIVERS**
- **COMPLETE BLU2LIGHT MESH NETWORK DEVICE**
- **OPERATING LIFETIME: 50,000 HRS.**
- **PRODUCT GUARANTEE: 5 YEARS**



Blu2Light Connect ME / MEC

Blu2Light Connect ME / ME-BK

For ceiling or luminaire installation
Dimensions (ØxH): 40x40 mm
With cord grip and built-in LED (blue-green): This flashes in configuration mode.
Weight: 30 g
Ref no.: 186768 / 187599




Blu2Light Connect MEC-WH / MEC-BK

For ceiling or luminaire installation
Dimensions (ØxH): 40x24 mm
With pre-assembled cables and built-in LED (blue-green):
This flashes in configuration mode.
Weight: 30 g
Best.-Nr.: 187544 / 187600

Type	Blu2Light Connect ME (186768), Blu2Light Connect ME-BK (187599)
Ref. No.	Blu2Light Connect MEC (187544), Blu2Light Connect MEC-BK (187600)
Communication	Blu2Light Mesh Network
Frequency range	2402–2480 MHz
HF output power	< 10 mW EIRP
Power consumption standby/operation	< 0.24 W (max. 15 mA at 16 V)
Power supply	via DALI bus
Operating temperature t _a	0–50 °C
IP protection	IP20
Protection class	II
Dimensions (Ø x H)	40x40 mm (ME with cord grip) / 40x20 mm (MEC)
Casing	polycarbonat, white / black
Weight	30 g
Plug-in terminals for conductor cross-section	0,5–1,5 mm² (ME) / 2x 0,5 mm², cable length 400 mm (MEC)

Product guarantee

- 5 years
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com). We will be happy to send you these conditions upon request.



The values in this data sheet may change due to technical innovations and are subject to change without notice.

Blu2Light Connect ME / MEC

General Safety and Mounting Instructions

- Only qualified persons are allowed to install Blu2Light products.
- Prior to installing and commissioning the system, read these instructions carefully. Only this will guarantee correct and safe handling. Please keep these instructions as you may need them later.
- The devices must always be disconnected before any work is carried out on them.
- The applicable safety and accident prevention regulations must be observed.
- Opening by unqualified personnel of the products is prohibited: Risk of death from electric shock!
The devices must only be repaired by the manufacturer.
- Only DALI power supply may be connected.
- Overvoltage protection of the DALI interface: Connecting higher voltages than DALI voltage will destroy the products. Operation with 24 V / 110 V / 230 V is generally not permitted!


Mounting

- First feed the cables through the counter ring and then through the pre-drilled hole (Ø 35 mm) in the sheet metal to connect them to the Connect ME terminal. Then insert the Connect ME into the sheet metal from the front and press the counter ring from the other side with the retaining lugs into the recesses provided until the ring snaps into place (see Figure 1).
When installing with pre-assembled cables, first feed them through the pre-drilled hole (Ø 35 mm) from the outside. Then insert the Connect ME into the sheet metal from the front. Fix it in the sheet metal with plastic-compatible silicone or adhesive. Then connect the pre-assembled cables.

Please note that the cables are designed without strain relief.

Installation instructions DALI connection

- Conductor cross-section for all terminals: 0.5-1.5 mm² for rigid or flexible conductors

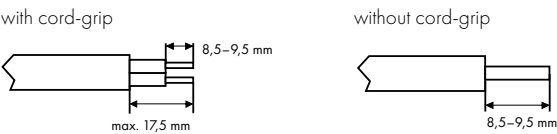

- The DALI bus is not designed in SELV as standard. Cables must be mains voltage-proof.
- Running the DALI bus line together with the mains line in one cable is permitted up to a maximum of 100 m, e.g. with NYM 5x1.5 mm². Please ensure that the maximum length for the DALI bus is observed during installation:

	2,5/1,5mm²	1mm²	0,75mm²	0,5mm²
6,2 Ω max.	300m	180m	130m	80m

Setup and operation

- The Blu2Light devices are configured with the LiNA Connect app and can be operated via the LiNA Touch app.
- For the exact procedure for the configuration of the devices please refer to the instructions in the LiNA Connect app or in the corresponding documentation.
- A tablet is required for setup, both tablets and smartphones can be used for operation. Both are not included in the scope of delivery.
- For information on the iOS and Android operating systems that can currently be used, refer to the LiNA Connect/ LiNA Touch manual:



Important note:

- Please refer to the installation instructions included with the product and the applicable Blu2Light system data sheet before installation. Make sure that the Bluetooth radio signal can propagate freely according to the specifications.
- All Blu2Light devices that are supplied via DALI may only be connected to one DALI power supply! Therefore, it is not permissible to connect several Blu2Light devices to one power supply. In this case, malfunctions will occur.
- CAUTION: If this Blu2Light product is connected to several DALI drivers with an active DALI interface (e.g. D4i), the product may be permanently damaged immediately after the operating voltage is applied if the sum of the individual supplies exceeds the maximum DALI current. Switching on the supply voltage without first checking the maximum current must therefore be ruled out. If necessary, the power supplies of individual DALI devices must be deactivated individually before commissioning the system; the steps required for this can be found in the manual of the respective manufacturer of the operating device.

Bluetooth® wireless technology

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Vossloh-Schwabe is under license. Other trademarks and trade names are those of their respective owners.



We, Vossloh-Schwabe Deutschland GmbH, herewith confirm that these devices comply with the basic requirements of the directive 2014/53 / EU and other relevant directives. The entire text of the declaration of conformity can be obtained from the following address:
www.vossloh-schwabe.com

The values in this data sheet may change due to technical innovations and are subject to change without notice.

