

CC TRACK DIP SWITCH



EASYLINE DIP SWITCH LUT-445

187728, 187729

Typical Applications

For common track systems

- Retail lighting
- Office lighting



EasyLine DIP switch LUT-445

- **SELECTABLE OUTPUT CURRENT VIA DIP SWITCH**
- **COMPATIBLE WITH DIFFERENT 3-PHASE TRACK SYSTEMS**
- **NON-ISOLATED**
- **LONG SERVICE LIFE: UP TO 100.000 HRS.**
- **PRODUCT GUARANTEE: 5 YEARS**
- **HIGH EFFICACY: UP TO 94%**



EasyLine DIP switch LUT-445

Product features

- Adapter with integrated LED driver electronics for common 3-phase track systems (compatibility see page 4)
- Available in two different casing colours: white (RAL 9003) and black (RAL 9005)

Functions

- Selectable current output by DIP switches
- The output current can be freely adjusted between 150 mA and 500 mA

Electrical features

- Mains voltage: 220–240 V $\pm 10\%$
- Mains frequency: 50–60 Hz
- Power factor at full load: > 0.95
- Open circuit voltage ($U_{max.}$): 230 V
- Secondary side switching of LED modules is not allowed.
- SVM: < 0.4
- PstLM: < 1

Safety features

- Protection against transient main peaks up to 1 kV (between L and N)
up to 2 kV (L/N and PE)
- Electronic short-circuit protection
- Overload protection
- Degree of protection: IP20
- Protection class I

Packaging units

Type	Packaging unit		
	Pieces per box	Boxes per pallet	Weight g
ECXe 500.827	35	22	210

Product guarantee

- 5 years
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com).
We will be happy to send you these conditions upon request.





Applied standards

- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2
- EN 61000-3-3
- EN 62384
- EN 55015



Dimensions


Type	Casing	Length mm	Width mm	Height mm
all types	LUT-445	445.7	31.5	36.3



Holder for track adapter

Material: t.b.d.

Ref. No.: t.b.d.



The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

LED Drivers – EasyLine DIP switch LUT-445

Electrical characteristics

Max. output W	Type	Ref. No.	Casing colour	Voltage 50–60 Hz V	Mains current mA	Inrush current A / μ s	Current output DC mA ($\pm$ 5%)	Voltage output DC (V)	THD at full load % (230 V)	Efficiency at full load % (230 V)	Ripple 100 Hz %
78	ECXe 500.827	187728	white (RAL 9003)	220–240	345–320	45 / 180	150/200/250/300/350/400/450/500	54–200	7	94	< 1
		187729	black (RAL 9005)								

Maximum ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the drivers.

Type	Ambient temperature range		Operation humidity range		Storage temperature range		Storage humidity range		Max. operation temperature at t_c point °C	Degree of protection
	°C min.	°C max.	% min.	% max.	°C min.	°C max.	% min.	% max.		
ECXe 500.827	–20	+40	10	90	–20	+85	10	90	+70	IP20

Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.	
	187728, 187729	
All	60 °C	70 °C
hrs.	100.000	50.000

DIP switch settings

ECXe 500.827							
Pin 1	Pin 2	Pin 3	Pin 4	Output W	Current mA	Voltage V	Factory settings (mA)
OFF	OFF	OFF	OFF	30	150	54–200	150
OFF	OFF	OFF	ON	40	200		
OFF	OFF	ON	OFF	50	250		
OFF	OFF	ON	ON	60	300		
OFF	ON	OFF	OFF	70	350		
OFF	ON	OFF	ON	80	400		
OFF	ON	ON	OFF	78	450	54–170	150
OFF	ON	ON	ON	78	500	54–155	

Product label

INPUT

UN = 220...240VAC

IN = Max. 420mA

fN = 50/60Hz

λ = 0.81C...0.95

VS LIGHTING SOLUTIONS

Vossloh-Schwabe Deutschland GmbH

Stuttgarter Straße 61/1, 73614 Schorndorf

Constant Current Lighting track adaptors

For LED modules only

Type ECXe 500.827

Ref.-No. 187728

Made in China

tc = 70°C

ta = -20...+40°C

Fmax. 90N↓

Pin 1
Pin 2
Pin 3
Pin 4

• tc

				OUTPUT m				54...200	230
Pin1	Pin2	Pin3	Pin4	Rated(mA)	Rated(W)	Rated(VDC)	Usor(VDC)		
OFF	OFF	OFF	OFF	150	30	54...200	230		
OFF	OFF	OFF	ON	200	40				
OFF	OFF	ON	OFF	250	50				
OFF	OFF	ON	ON	300	60				
OFF	ON	OFF	OFF	350	70				
OFF	ON	OFF	ON	400	80				
OFF	ON	ON	OFF	450	77.85	50...173	50...156		
OFF	ON	ON	ON	500	78	50...156			

INPUT

UN = 220...240VAC

IN = Max. 420mA

fN = 50/60Hz

λ = 0.81C...0.95

VS LIGHTING SOLUTIONS

Vossloh-Schwabe Deutschland GmbH

Stuttgarter Straße 61/1, 73614 Schorndorf

Constant Current Lighting track adaptors

For LED modules only

Type ECXe 500.827

Ref.-No. 187729

Made in China

tc = 70°C

ta = -20...+40°C

Fmax. 90N↓


Pin 1
Pin 2
Pin 3
Pin 4

• tc

				OUTPUT m				54...200	230
Pin1	Pin2	Pin3	Pin4	Rated(mA)	Rated(W)	Rated(VDC)	Usor(VDC)		
OFF	OFF	OFF	OFF	150	30	54...200	230		
OFF	OFF	OFF	ON	200	40				
OFF	OFF	ON	OFF	250	50				
OFF	OFF	ON	ON	300	60				
OFF	ON	OFF	OFF	350	70				
OFF	ON	OFF	ON	400	80				
OFF	ON	ON	OFF	450	77.85	50...173	50...156		
OFF	ON	ON	ON	500	78	50...156			

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Typ. performance graphs for 187728, 187729 / Type ECXe 500.827

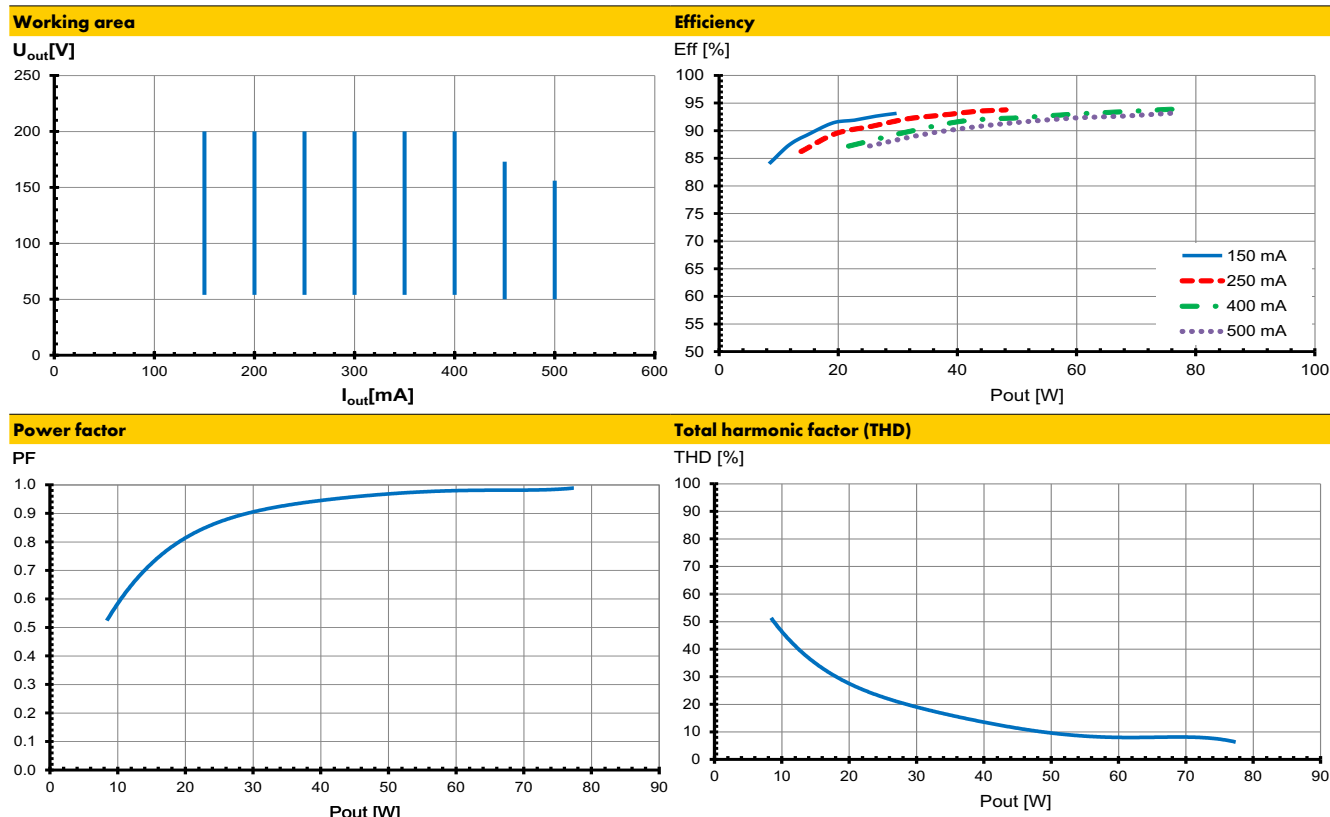

Safety functions

- Transient mains peaks protection:
Values are in compliance with EN 61547 (interference immunity).
Surges between L and N: up to 1 kV
Surges between L/N-PE: up to 2 kV
- Short-circuit protection:
The control gear is protected against permanent short-circuit with shut down function.
- Overload protection: The control gear only works in range of rated output power and voltage problemfree.
Please check before switch-on mains power supply that the selected LED load is suitable (see electrical characteristics on data sheet).
- Overheating: The control gear has overheating protection acc. to IEC 61347-1 C 5a. In case of overheating the control gear will shut down and auto resume after temperature problem is removed.

If any of the above mentioned safety functions will be triggered, disconnect the control gear from the power supply then find and eliminate the cause of the problem.

Compatibility of track rails

Tested at the following tracks (3-phase, without DALI)

Manufacturer	Type	System 3P	Horizontal Operation Recommended	Vertical Operation Recommended
Stucchi	9000-1-ST	3P	Yes	Yes
EUTRAC	25-106	3P	Yes	Yes
Powergear	Pro-043	3P	Yes	Yes
ERCO	1079301000	3P	Yes	Yes
UniPro	T32B	3P	Yes	Yes

Vossloh-Schwabe does not guarantee the compatibility of the tracks and the track-adaptor, because manufacturing tolerances of the tracks or changes made at the tracks by the manufacturer could affect the compatibility between the tracks and the adaptor.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advices must be observed; non-observance can result in the destruction of the LED drivers, fire and/or other hazards.

Mandatory regulations


- DIN VDE 0100
- EN 60598-1

Mechanical mounting

- Mounting position and location: Common track system
- 3-phase option: 3 phases are selectable with a rotary switch. The neutral is in a fixed position in the track.
- Degree of protection: IP20
- Fastening: Double mechanical locking for perfect track fixing
- Load: max. up to 50 Nm

Electrical installation

- Connection terminals: Push-in terminals for rigid or flexible conductors with a section of 0.2–0.75 mm²
- Stripped length: 8.5–10 mm
- Polarity: Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- Through-wiring: Is not allowed.
- Secondary load: The sum of forward voltages of LED loads has to be within the tolerances which are mentioned in the table "Electrical Characteristics" in this data sheet.
- Wiring diagram:



Selection of automatic cut-outs for VS LED drivers

- Dimensioning automatic cut-outs
High transient currents occur when an LED driver is switched on because the capacitors have to load. Ignition of LED modules occurs almost simultaneously. This also causes a simultaneous high demand for power. These high currents when the system is switched on put a strain on the automatic conductor cut-outs, which must be selected and dimensioned to suit.
- Release reaction
The release reaction of the automatic conductor cut-outs comply with VDE 0641, part 11, for B, C characteristics. The values shown in the following tables are for guidance purposes only and are subject to system-dependent change.
- No. of LED drivers
The maximum number of VS LED drivers applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible drivers must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 mΩ (approx. 20 m [2.5 mm²] of conductor from the power supply to the distributor and a further 15 m to the luminaire).

Type	Ref. No.	Automatic cut-out type and possible no. of VS drivers pcs.					
Automatic cut-out type		B 10 A	B 16 A	B 20 A	C 10 A	C 16 A	C 20 A
ECXe 500.827	187728	10	16	20	16	27	33
	187729						

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.