

# CC COMPACT DIP SWITCH MINI SLIM DALI2



## COMFORTLINE DIP SWITCH MINI SLIM DALI2

**187495, 187496**

### Typical Applications

Independent for compact luminaires for

- Recessed lighting
- Downlights



### ComfortLine DIP Switch Mini Slim DALI2

- **VERY LOW RIPPLE CURRENT: < 5%**
- **SELV**
- **LONG SERVICE LIFE:  
UP TO 100,000 HRS.**
- **PRODUCT GUARANTEE: 5 YEARS**



## ComfortLine Dip Switch Mini Slim DALI2

### Product features

- Compact casing shape

### Electrical features

- Mains voltage: 220–240 V ±10%
- Mains frequency: 50–60 Hz
- Push-in terminals  
primary: 0.75–1.5 mm<sup>2</sup>  
secondary: 0.5–1.5 mm<sup>2</sup>
- Power factor at full load: 0.9
- Open circuit voltage (U<sub>max.</sub>): 60 V
- Secondary side switching of LED modules is not allowed.

### Dimming

- Dimming range: 5 to 100%
- Dimming method: analogue

### Safety features


- Protection against transient main peaks up to 1 kV (between L and N)
- Electronic short-circuit protection
- Overload protection
- Protection against "no load" operation
- Degree of protection: IP20
- Protection class II
- SELV
- SVM: < 0.4
- PstLM: < 1

### Packaging units

Ref. No.	Packaging unit		Weight g
	Pieces per box	Boxes per pallet	
187495	160	36	55
187496	160	36	56


### Product guarantee

- 5 years  
for operation at recommended operation temperature (see table for expected service life time on the next page)
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage ([www.vossloh-schwabe.com](http://www.vossloh-schwabe.com)).  
We will be happy to send you these conditions upon request.

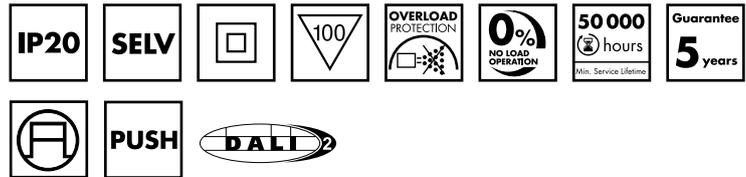

### Dimensions

- Casing shape: K109
- Length: 110 mm
- Width: 27.4 mm
- Height: 21 mm

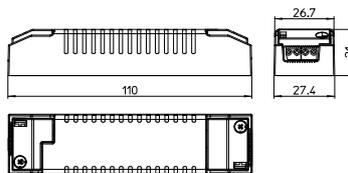

Allowed cable jacket diameter

for the cord-grips:

Input: 6 – 7 mm

DALI: 6 – 7 mm

Output: 6 – 7 mm

### Applied standards

- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2
- EN 62384
- EN 55015
- IEC 62386 ed.2 part 101/102/207



The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

# LED Drivers – ComfortLine DIP Switch Mini Slim DALI2

## Electrical characteristics

Max. output W	Type	Ref. No.	Voltage 50–60 Hz V	Mains current mA	Inrush current A / $\mu$ s	Current output DC mA ( $\pm$ 10%)	Voltage output DC [V]	THD at full load % (230 V)	Efficiency at full load % (230 V)	Ripple 100 Hz %
9.1	ECXd 700.700	<b>187496</b>	220–240	53–49	7 / 196	350/500/600/700	6–13	7	81	< 5
10.5	ECXd 250.699	<b>187495</b>	220–240	57–53	7 / 198	100/150/200/250	30–42	7	87	< 5

## Maximum ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the drivers.

Ref. No.	Ambient temperature range		Operation humidity range		Storage temperature range		Storage humidity range		Max. operation temperature at $t_c$ point °C	Degree of protection
	°C min.	°C max.	% min.	% max.	°C min.	°C max.	% min.	% max.		
187496, 187495	-20	+45	10	90	-40	+85	10	90	+75	IP20

## Expected service life time

at operation temperatures at  $t_c$  point

Operation current	Ref.No.	
	187496, 187495	
All	65 °C*	75 °C
hrs.	100.000	50.000

\* recommended operation temperature

## Product labels

0.75-1.5 □

- N
- L
- DA/N
- DA/L

Push-DIM

**Vossloh-Schwabe Deutschland GmbH**  
Stuttgarter Straße 61/1, 73614 Schorndorf  
Electronic converter for LED

Type ECXd 250.699 Ref. No. 187495  
Un = 220...240V-  $\lambda$  = 0.8C - 0.99  
In = 0.1A max. fn = 50/60Hz

Uout=30-42V  $\equiv$   
Umax=60V  $\equiv$   
Irated=250mA  
Prated=10.5W max.  
ta=-20...45°C  
tc=75°C  
Made in China

Iout	Uout	1	2
100mA	30-42V	-	-
150mA	30-42V	C	ON
200mA	30-42V	ON	-
250mA	30-42V	ON	ON

LED+ ■  
LED- ■  
0.5-1.5 □

0.75-1.5 □

- N
- L
- DA/N
- DA/L

Push-DIM

**Vossloh-Schwabe Deutschland GmbH**  
Stuttgarter Straße 61/1, 73614 Schorndorf  
Electronic converter for LED

Type ECXd 700.700 Ref. No. 187496  
Un = 220...240V-  $\lambda$  = 0.7C - 0.99  
In = 0.1A max. fn = 50/60Hz

Uout=6-13V  $\equiv$   
Umax=30V  $\equiv$   
Irated=700mA  
Prated=9.1W max.  
ta=-20...45°C  
tc=75°C  
Made in China


Iout	Uout	1	2
350mA	6-13V	-	-
500mA	6-13V	C	ON
600mA	6-13V	ON	-
700mA	6-13V	ON	ON

LED+ ■  
LED- ■  
0.5-1.5 □


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

## Typ. performance graphs for 187496 / Type ECXd 700.700


### Working area

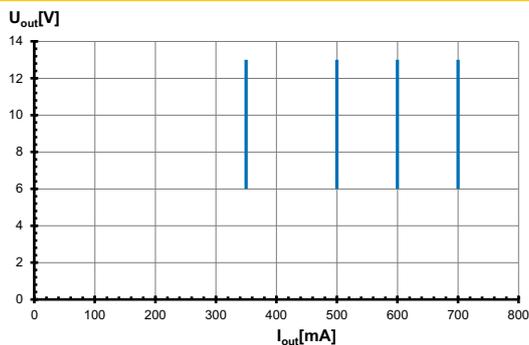


### Efficiency

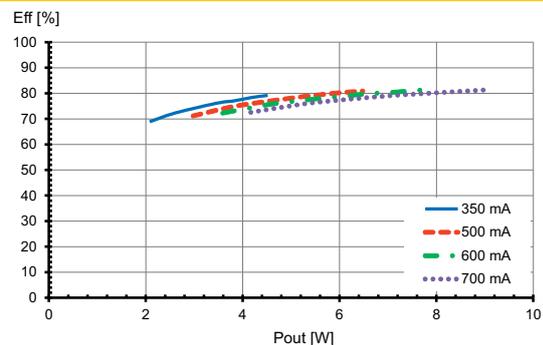

### Power factor

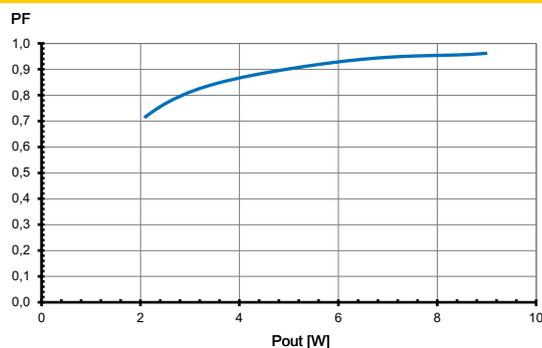


### Total harmonic factor (THD)

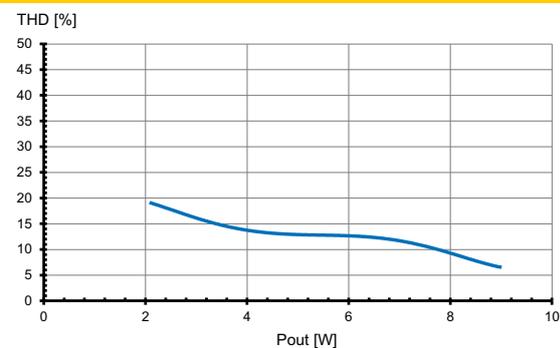


## Typ. performance graphs for 187495 / Type ECXd 250.699


### Working area

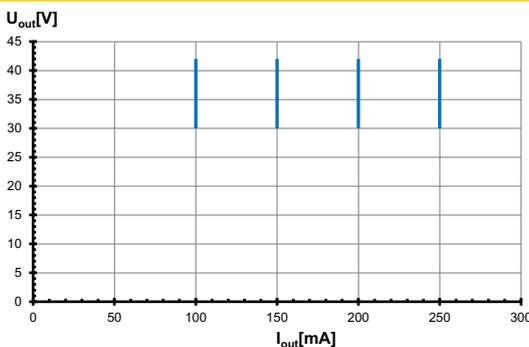


### Efficiency

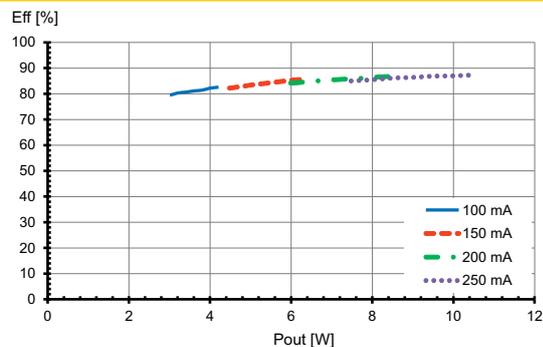

### Power factor

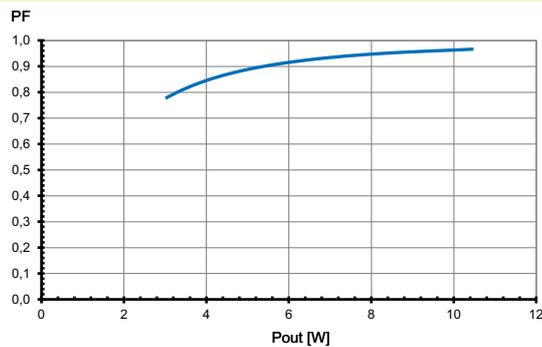

### Total harmonic factor (THD)

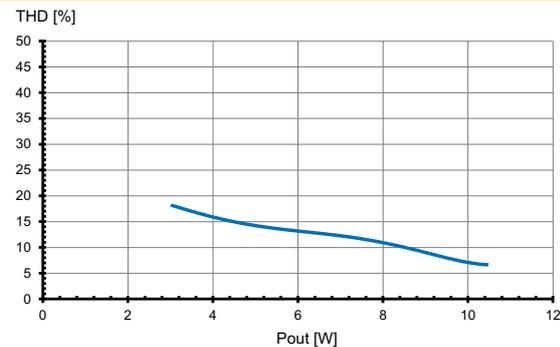

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

## Safety functions

- **Transient mains peaks protection:**  
Values are in compliance with EN 61547 (interference immunity).  
Surges between L–N: up to 1 kV
- **Short-circuit protection:** The control gears are protected against permanent short-circuit with automatic restart function.
- **Overload protection:** The control gears only work in range of rated output power and voltage problemfree.  
Please check before switch-on mains power supply that the selected LED load is suitable (see Electrical Characteristics on data sheet).
- **No load operation:** The control gear is protected against no load operation (open load).
- If any of the above mentioned safety functions will be triggered, disconnect the control gear from the power supply then find and eliminate the cause of the problem.

## Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advices must be observed; non-observance can result in the destruction of the LED drivers, fire and/or other hazards.

### Mandatory regulations

- DIN VDE 0100
- EN 60598-1

### Mechanical mounting


- **Mounting position:** Built-in: Any position inside a luminaire is allowed  
Independent application: Drivers are allowed to use for independent applications with an additional cord grip.
- **Mounting location:** LED drivers are designed for integration into luminaires or comparable devices.  
Independent LED drivers do not need to be integrated into a casing.  
Installation in outdoor luminaires: degree of protection for luminaire with water protection rate  $\geq 4$  (e.g. IP54 required).
- **Degree of protection:** IP20
- **Clearance:** Min. 0.10 m from walls, ceilings and insulation
- **Surface:** Solid and plane surface for optimum heat dissipation required.

- **Heat transfer:** If the driver is destined for installation in a luminaire, sufficient heat transfer must be ensured between the driver and the luminaire casing.  
LED drivers should be mounted with the greatest possible clearance to heat sources.  
During operation, the temperature measure at the driver's  $t_c$  point must not exceed the specified maximum value.
- **Fastening:** Using M4 screws in the designated holes
- **Tightening torque:** 0.2 Nm

### Electrical installation

- **Connection terminals:** Screw terminals for rigid or flexible conductors with a section of primary 0.75–1.5 mm<sup>2</sup> and secondary 0.5–1.5 mm<sup>2</sup>
- **Stripped length:** 8.5–10 mm
- **Wiring:** The mains conductor within the luminaire must be kept short (to reduce the induction of interference).  
Mains and lamp conductors must be kept separate and if possible should not be laid in parallel to one another.  
Max. secondary side lead length: 5 m
- **Polarity:** Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- **Through-wiring:** Is not allowed.
- **Secondary load:** The sum of forward voltages of LED loads is within the tolerances which are mentioned in the Electrical Characteristics on the data sheet.
- **Parallel wiring:** Parallel connection of LED loads is not allowed.

### Wiring diagram:

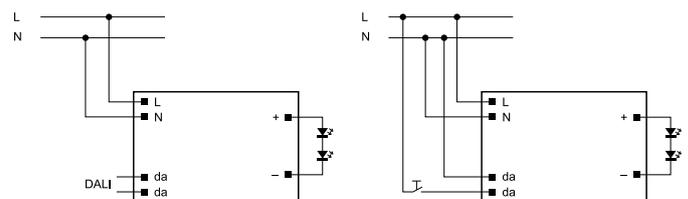

Note: Max. quantity of drivers at one push button: 30

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

## Selection of automatic cut-outs for VS LED drivers

- Dimensioning automatic cut-outs

High transient currents occur when an LED driver is switched on because the capacitors have to load. Ignition of LED modules occurs almost simultaneously. This also causes a simultaneous high demand for power. These high currents when the system is switched on put a strain on the automatic conductor cut-outs, which must be selected and dimensioned to suit.

- Release reaction

The release reaction of the automatic conductor cut-outs comply with VDE 0641, part 11, for B, C characteristics. The values shown in the following tables are for guidance purposes only and are subject to system-dependent change.

- No. of LED drivers

The maximum number of VS LED drivers applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible drivers must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 mΩ (approx. 20 m [2.5 mm<sup>2</sup>] of conductor from the power supply to the distributor and a further 15 m to the luminaire).

Type	Ref. No.	Automatic cut-out type and possible no. of VS drivers pcs.					
<b>Automatic cut-out type</b>		B 10 A	B 13 A	B 16 A	C 10 A	C 13 A	C 16 A
ECXd 700.700	<b>187496</b>	65	84	104	108	141	174
ECXd 250.699	<b>187495</b>	63	82	101	106	137	169

- To limit capacitive inrush currents the current carrying capacity of each circuit breaker (fuse) can be increased with the help of our ESB (Ref. No.: 149820, 149821, 149822) inrush current limiters.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.