

CC TRACK DIP SWITCH GEN. 3 PLUS



EASYLINE DIP SWITCH UT-135 GEN. 3 PLUS

187722, 187723, 187724, 187730, 187731, 187732

Typical Applications

For common track systems

- Retail lighting



EasyLine DIP switch UT-135 Gen. 3 Plus

- **SELECTABLE OUTPUT CURRENT VIA DIP SWITCH**
- **COMPATIBLE WITH DIFFERENT 3-PHASE TRACK SYSTEMS**
- **SELV**
- **LONG SERVICE LIFE:
UP TO 100.000 HRS.**
- **PRODUCT GUARANTEE: 5 YEARS**



EasyLine DIP switch UT-135 Gen. 3 Plus

Product features

- Adapter with integrated LED driver electronics for common 3-phase track systems (compatibility see page 4)
- Available in three different casing colours: white (RAL 9003), black (RAL 9005) and grey (RAL 7040)

Functions

- Selectable current output by DIP switches
- The output current can be freely adjusted between 125 mA and 1050 mA

Electrical features

- Mains voltage: 220–240 V $\pm 10\%$
- Mains frequency: 50–60 Hz
- Power factor at full load: > 0.97
- Open circuit voltage ($U_{max.}$): 59 V
- Secondary side switching of LED modules is not allowed.
- SVM: < 0.4
- PstLM: < 1

Safety features


- Protection against transient main peaks up to 1 kV (between L and N)
- Electronic short-circuit protection
- Overload protection
- Degree of protection: IP20
- Protection class II
- SELV

Packaging units

Type	Packaging unit		
	Pieces per box	Boxes per pallet	Weight g
ECXe 1050.825	50	36	101
ECXe 400.828	50	36	89

Product guarantee

- 5 years
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com). We will be happy to send you these conditions upon request.




Applied standards

- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2
- EN 61000-3-3
- EN 62384
- EN 55015

Dimensions

Type	Casing	Length mm	Width mm	Height (mm) visible
All types	UT-135	133.2	31.1	42.2 14.1

UT-135

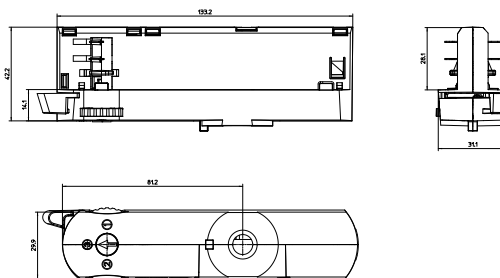


Connector nipple for track adapter

Material: zinc die-cast

Ref. No.: 187360


M10x1, length: 10 mm



Material: aluminium

Ref. No.: 187275

M10x1, length: 8 mm



The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Electrical characteristics

Max. output W	Type	Ref. No.	Casing colour	Voltage 50–60 Hz V	Mains current mA	Inrush current A / μ s	Current output DC mA ($\pm$ 5%)*	Voltage output DC (V)	THD at full load % (230 V)	Efficiency at full load % (230 V)	Ripple 100 Hz %
40	ECXe 1050.825	187722	white (RAL 9003)	220–240	209...193	20 / 136	300–1050	see table DIP settings	8	91	1
		187723	black (RAL 9005)								
		187724	grey (RAL 7040)								
16	ECXe 400.828	187730	white (RAL 9003)	220–240	98...92	14.5 / 120	125–400	see table DIP settings	10	90	1
		187731	black (RAL 9005)								
		187732	grey (RAL 7040)								

* For output currents below 400 mA: $\pm$ 7%; below 200 mA: $\pm$ 8%

Maximum ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the drivers.

Type	Ambient temperature range		Operation humidity range		Storage temperature range		Storage humidity range		Max. operation temperature at t_c point °C	Degree of protection
	°C min.	°C max.	% min.	% max.	°C min.	°C max.	% min.	% max.		
ECXe 1050.825	–20	+35	20	90	–40	+85	20	90	+80	IP20
ECXe 400.828									+65	

Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.			
	187722, 187723, 187724		187730, 187731, 187732	
All	70 °C	80 °C	55 °C	65 °C
hrs.	100.000	50.000	100.000	50.000

DIP switch settings


ECXe 400.828							
Pin 1	2	3	4	Output W	Current mA	Voltage V	Factory settings (mA)
OFF	OFF	OFF	OFF	5	125	24–42	400
ON	OFF	OFF	OFF	6	150		
OFF	ON	OFF	OFF	7	175		
OFF	OFF	ON	OFF	8	200		
OFF	ON	ON	OFF	9	225		
ON	ON	ON	OFF	10	250		
OFF	OFF	OFF	ON	11	275		
ON	OFF	OFF	ON	12	300		
OFF	ON	OFF	ON	13	325		
OFF	OFF	ON	ON	14	350		
ON	OFF	ON	ON	15	375		
ON	ON	ON	ON	16	400		

ECXe 1050.825							
Pin 1	2	3	4	Output W	Current mA	Voltage V	Factory settings (mA)
OFF	OFF	OFF	OFF	12	300	9–40	1050
ON	OFF	OFF	OFF	14	350		
OFF	ON	OFF	OFF	16	400		
ON	ON	OFF	OFF	18	450		
OFF	OFF	ON	OFF	20	500		
ON	OFF	ON	OFF	22	550		
OFF	ON	ON	OFF	24	600		
ON	ON	ON	OFF	26	650		
OFF	OFF	OFF	ON	28	700		
ON	OFF	OFF	ON	30	750		
OFF	ON	OFF	ON	32	800		
ON	ON	OFF	ON	34	850		
OFF	OFF	ON	ON	36	900		
ON	OFF	ON	ON	38	950		
OFF	ON	ON	ON	40	1000		
ON	ON	ON	ON	40	1050	9–38	


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Typ. performance graphs for 187722, 187723, 187724 / Type ECXe 1050.825


Working area

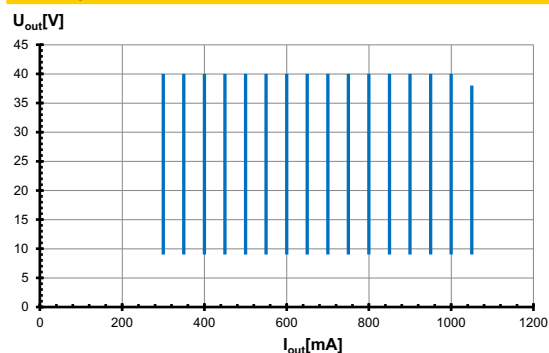


Efficiency

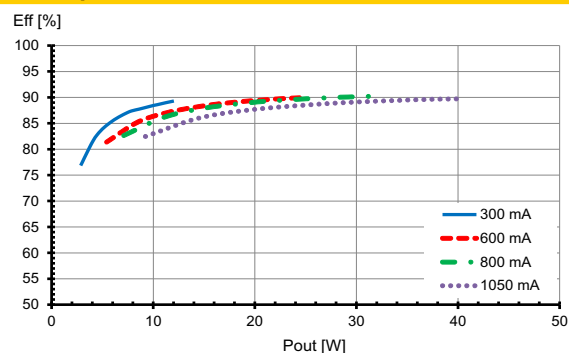

Power factor

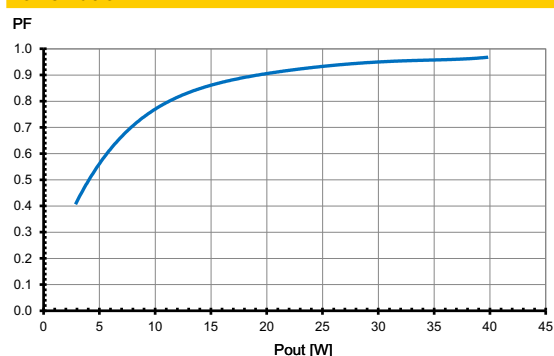


Total harmonic factor (THD)

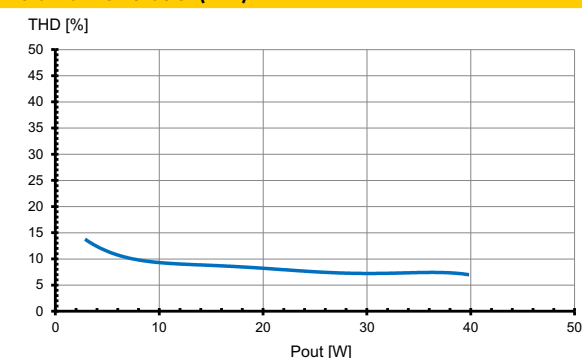


Typ. performance graphs for 187730, 187731, 187732 / Type ECXe 400.828


Working area

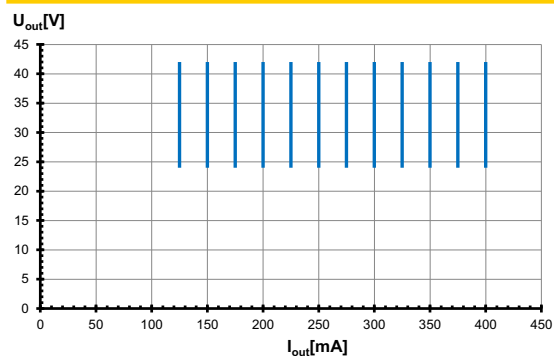


Efficiency

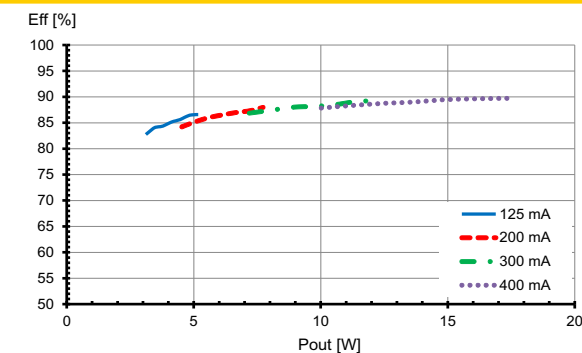

Power factor

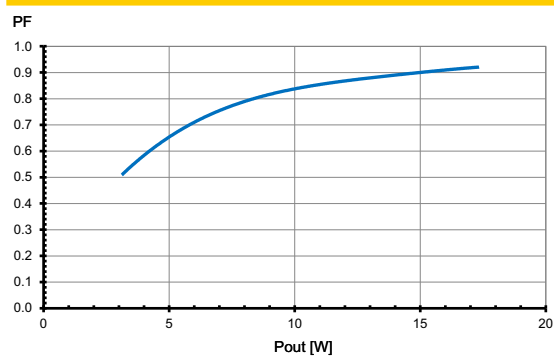

Total harmonic factor (THD)

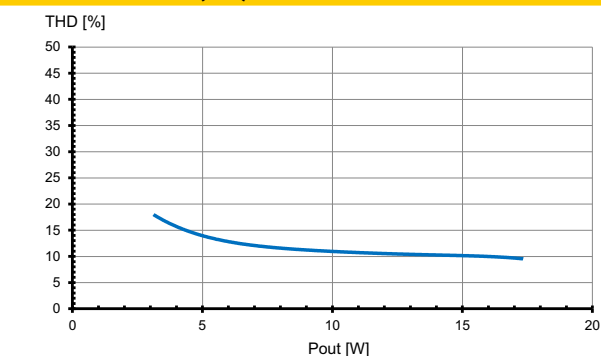

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Product labels

VS LIGHTING SOLUTIONS
Vossloh-Schwabe Deutschland GmbH
Stuttgarter Straße 61/1 73614 Schorndorf
Electronic Controlgear for LED

Type ECXe 1050.825
Ref.-No. 187722
Made in China
P42 211BXXXXXX

LED + ■
LED - ■
0.5-1.5mm²

DIP	1	2	3	4	5	6	7	8	9	10	11	12
12	14	16	18	20	22	24	26	28	30	32	34	36
38	40	40										

Un: 220-240V ~ In: 0.27A max. fn: 50/60Hz
Uout: max.59V ~ PF: 0.4C - 0.95 ta: 35°C tc: 80°C

CE UK ENEC 05 110 SELV

VS LIGHTING SOLUTIONS
Vossloh-Schwabe Deutschland GmbH
Stuttgarter Straße 61/1 73614 Schorndorf
Electronic Controlgear for LED

Type ECXe 400.828
Ref.-No. 187730
Made in China
P42 211BXXXXXX

LED + ■
LED - ■
0.5-1.5mm²

DIP	1	2	3	4	5	6	7	8	9	10	11	12
125	150	175	200	225	250	275	300	325	350	375	400	
5.3	6.3	7.3	8.4	9.5	10.5	11.5	12.6	13.6	14.7	15.7	16.8	

Un: 220-240V ~ In: 0.12A max. fn: 50/60Hz
Uout: max.59V ~ PF: 0.5C - 0.95 ta: 35°C tc: 65°C

CE UK ENEC 05 110 SELV

VS LIGHTING SOLUTIONS
Vossloh-Schwabe Deutschland GmbH
Stuttgarter Straße 61/1 73614 Schorndorf
Electronic Controlgear for LED

Type ECXe 1050.825
Ref.-No. 187723
Made in China
P42 211BXXXXXX

LED + ■
LED - ■
0.5-1.5mm²

DIP	1	2	3	4	5	6	7	8	9	10	11	12
12	14	16	18	20	22	24	26	28	30	32	34	36
38	40	40										

Un: 220-240V ~ In: 0.27A max. fn: 50/60Hz
Uout: max.59V ~ PF: 0.4C - 0.95 ta: 35°C tc: 80°C

CE UK ENEC 05 110 SELV

VS LIGHTING SOLUTIONS
Vossloh-Schwabe Deutschland GmbH
Stuttgarter Straße 61/1 73614 Schorndorf
Electronic Controlgear for LED

Type ECXe 400.828
Ref.-No. 187731
Made in China
P42 211BXXXXXX

LED + ■
LED - ■
0.5-1.5mm²

DIP	1	2	3	4	5	6	7	8	9	10	11	12
125	150	175	200	225	250	275	300	325	350	375	400	
5.3	6.3	7.3	8.4	9.5	10.5	11.5	12.6	13.6	14.7	15.7	16.8	

Un: 220-240V ~ In: 0.12A max. fn: 50/60Hz
Uout: max.59V ~ PF: 0.5C - 0.95 ta: 35°C tc: 65°C

CE UK ENEC 05 110 SELV

VS LIGHTING SOLUTIONS
Vossloh-Schwabe Deutschland GmbH
Stuttgarter Straße 61/1 73614 Schorndorf
Electronic Controlgear for LED

Type ECXe 1050.825
Ref.-No. 187724
Made in China
P42 211BXXXXXX

LED + ■
LED - ■
0.5-1.5mm²

DIP	1	2	3	4	5	6	7	8	9	10	11	12
12	14	16	18	20	22	24	26	28	30	32	34	36
38	40	40										

Un: 220-240V ~ In: 0.27A max. fn: 50/60Hz
Uout: max.59V ~ PF: 0.4C - 0.95 ta: 35°C tc: 80°C

CE UK ENEC 05 110 SELV

VS LIGHTING SOLUTIONS
Vossloh-Schwabe Deutschland GmbH
Stuttgarter Straße 61/1 73614 Schorndorf
Electronic Controlgear for LED

Type ECXe 400.828
Ref.-No. 187732
Made in China
P42 211BXXXXXX

LED + ■
LED - ■
0.5-1.5mm²

DIP	1	2	3	4	5	6	7	8	9	10	11	12
125	150	175	200	225	250	275	300	325	350	375	400	
5.3	6.3	7.3	8.4	9.5	10.5	11.5	12.6	13.6	14.7	15.7	16.8	

Un: 220-240V ~ In: 0.12A max. fn: 50/60Hz
Uout: max.59V ~ PF: 0.5C - 0.95 ta: 35°C tc: 65°C

CE UK ENEC 05 110 SELV

Safety functions

- Transient mains peaks protection:
Values are in compliance with EN 61547 (interference immunity).
Surges between L-N: up to 1 kV
- Short-circuit protection:
The control gear is protected against permanent short-circuit with shut down function.
- Overload protection:
The control gear only works in range of rated output power and voltage problemfree.
Please check before switch-on mains power supply that the selected LED load is suitable (see electrical characteristics on data sheet).
- Overheating:
The control gear has overheating protection acc. to IEC 61347-1 C 5a. In case of overheating the control gear will shut down and auto resume after temperature problem is removed.

If any of the above mentioned safety functions will be triggered, disconnect the control gear from the power supply then find and eliminate the cause of the problem.

Compatibility of track rails

Suitable for following tracks (3-phase, without DALI)

Manufacturer	Type	System 3P	Horizontal Operation Recommended	Vertical Operation Recommended
EUTRAC	25-XX-XX/26-XX-XX	3P	Yes	No
LUMISYS UNIPRO	T32/T33/34	3P	Yes	Yes
LUMISYS UNIPRO	T32F/T33F/34F	3P	Yes	Yes
Unipro	T32W	3P	Yes	Yes
NORDIC ALUMINIUM	GLOBAL Trac Pro XTS 4XXX	3P	Yes	Yes
NORDIC ALUMINIUM	GLOBAL Trac Pro XTSF 4XXX	3P	Yes	Yes
ERCO	783...	3P	Yes	No
Stucchi	One track	3P	Yes	Yes
Powergear	PRO-0610	3P	Yes	No

Vossloh-Schwabe does not guarantee the compatibility of the tracks and the track-adaptor, because manufacturing tolerances of the tracks or changes made at the tracks by the manufacturer could affect the compatibility between the tracks and the adaptor.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advices must be observed; non-observance can result in the destruction of the LED drivers, fire and/or other hazards.

Mandatory regulations


- DIN VDE 0100
- EN 60598-1

Mechanical mounting

- Mounting position and location:
Common track system
- 3-phase option:
3 phases are selectable with a rotary switch.
The neutral is in a fixed position in the track.
- Degree of protection: IP20
- Fastening:
Double mechanical locking for perfect track fixing
- Load:
max. up to 50 Nm

Electrical installation

- Connection terminals:
Push-in terminals for rigid or flexible conductors with a section of 0.2–0.75 mm²
- Stripped length:
8.5–10 mm
- Polarity:
Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- Through-wiring:
Is not allowed.
- Secondary load:
The sum of forward voltages of LED loads has to be within the tolerances which are mentioned in the table "Electrical Characteristics" in this data sheet.
- Wiring diagram:



Selection of automatic cut-outs for VS LED drivers

- Dimensioning automatic cut-outs
High transient currents occur when an LED driver is switched on because the capacitors have to load. Ignition of LED modules occurs almost simultaneously. This also causes a simultaneous high demand for power. These high currents when the system is switched on put a strain on the automatic conductor cut-outs, which must be selected and dimensioned to suit.
- Release reaction
The release reaction of the automatic conductor cut-outs comply with VDE 0641, part 11, for B, C characteristics. The values shown in the following tables are for guidance purposes only and are subject to system-dependent change.
- No. of LED drivers
The maximum number of VS LED drivers applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible drivers must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 mΩ (approx. 20 m [2.5 mm²] of conductor from the power supply to the distributor and a further 15 m to the luminaire).

Type	Ref. No.	Automatic cut-out type and possible no. of VS drivers pcs.		
Automatic cut-out type B		B 10 A	B 16 A	B 20 A
ECXe 1050.825	187722, 187723, 187724	30	48	60
Automatic cut-out type C		C 10 A	C 16 A	C 20 A
ECXe 1050.825	187722, 187723, 187724	43	68	86
Automatic cut-out type B		B 10 A	B 16 A	B 20 A
ECXe 400.828	187730, 187731, 187732	48	63	97
Automatic cut-out type C		C 10 A	C 16 A	C 20 A
ECXe 400.828	187730, 187731, 187732	80	105	161

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.