

# LEDSPOTS CC

ACTIVE PLUS – 36 V

GEN. 3



## MODULAR LED SPOTS AND ENGINES FOR MULTIPLE OPTICS CONFIGURATIONS

One of the main characteristics of this LED spots and engines is their flexibility. The modularity of these LED engines allows you to combine different lenses and reflectors in order to get the result you expect.

Moreover, with its easy to fit technology you connect lenses or reflectors in a blink of an eye – just click it in.

### Typical applications for LEDSpots

Integration in luminaires

- Residential lighting
- Retail lighting
- Hospitality lighting
- Museum lighting

### Active Plus – 36 V


- **MODULAR SYSTEM: ENGINE + REFLECTORS**
- **NARROW COLOUR TOLERANCES: 3 STEP MACADAM**
- **COLOUR RENDERING INDEX: CRI 92**
- **LUMINOUS FLUX: UP TO 1400 LM (CRI 92)**
- **MADE IN ITALY**



## Active VCA2-123 PLUS – up to 350 mA

### Technical notes


Reflector: Ø 50 mm, heat sink material: aluminium  
 Lumen maintenance: L80/B10; 50,000 hrs. 75 °C at  $t_p$  point  
 Max. operating temperature at  $t_c$  point: 80 °C  
 Temperature depends on installation situation and has to be checked by the luminaire manufacturer.  
 Colour accuracy initially: 3 SDCM  
 Plastic clear cover to protect reflector (opaque cover on request)  
 Leads: Cu tinned, stranded conductors 0.5 mm<sup>2</sup>, length: 200 mm, stripped lead ends (with plug on request)  
 With integrated cord grip  
 Packaging unit: 28 pcs.

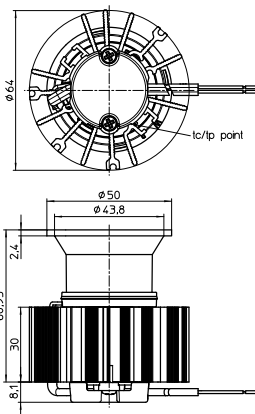

### Electrical characteristics

Type	250 mA		300 mA		350 mA	
	$P_{el}$ (W)	$V_f$ (V)	$P_{el}$ (W)	$V_f$ (V)	$P_{el}$ (W)	$V_f$ (V)
VCA2-123	8.6	34.3	10.4	34.7	12.3	35.2

Voltage and power tolerance:  $\pm 10\%$

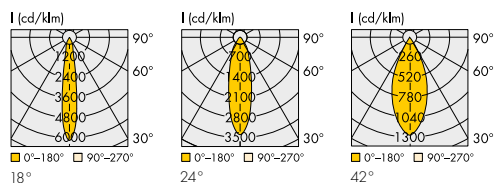

Type	Ref. No.	Colour	Correlated colour temp. K	Typ. luminous flux and efficiency at						Light intensity at max. current Candela	Beam angle °	CRI $R_g$
				250 mA lm	250 mA lm/W	300 mA lm	300 mA lm/W	350 mA lm	350 mA lm/W			
<b>Warm white – 2700 K</b>												
Active VCA2-123 PLUS 927	<b>572358</b>	warm white	2700	965	112	1140	110	1290	105	7670	18	92
Active VCA2-123 PLUS 927	<b>572359</b>	warm white	2700	950	110	1125	108	1275	104	4360	24	92
Active VCA2-123 PLUS 927	<b>572360</b>	warm white	2700	965	112	1140	110	1290	105	1590	42	92
<b>Warm white – 3000 K</b>												
Active VCA2-123 PLUS 930	<b>572361</b>	warm white	3000	1025	119	1215	117	1375	112	8180	18	92
Active VCA2-123 PLUS 930	<b>572362</b>	warm white	3000	1015	118	1200	115	1360	111	4650	24	92
Active VCA2-123 PLUS 930	<b>572363</b>	warm white	3000	1025	119	1215	117	1375	112	1700	42	92
<b>Neutral white – 4000 K</b>												
Active VCA2-123 PLUS 940	<b>572364</b>	neutral white	4000	1055	123	1250	120	1415	115	8420	18	92
Active VCA2-123 PLUS 940	<b>572365</b>	neutral white	4000	1045	122	1235	119	1400	114	4790	24	92
Active VCA2-123 PLUS 940	<b>572366</b>	neutral white	4000	1055	123	1250	120	1415	115	1750	42	92



Production tolerance of luminous flux and efficiency:  $\pm 10\%$

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

## Active VCA2-123 PLUS – up to 300 mA

### Technical notes

Reflector: Ø 50 mm, heat sink material: aluminium  
 Lumen maintenance: L80/B10; 50,000 hrs. 75 °C at t<sub>p</sub> point  
 Max. operating temperature at t<sub>c</sub> point: 90 °C  
 Temperature depends on installation situation and has to be checked by the luminaire manufacturer.  
 Colour accuracy initially: 3 SDCM  
 Plastic clear cover to protect reflector (opaque cover on request)  
 Leads: Cu tinned, stranded conductors 0.5 mm<sup>2</sup>, length: 200 mm, stripped lead ends (with plug on request)  
 With integrated cord grip  
 Packaging unit: 45 pcs.

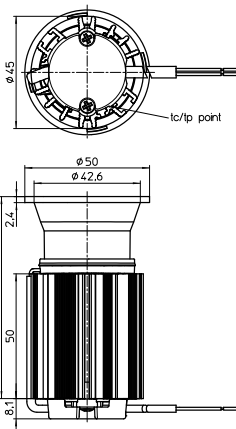


up to 300 mA

### Electrical characteristics

Type	200 mA		250 mA		300 mA	
	P <sub>el</sub> (W)	V <sub>f</sub> (V)	P <sub>el</sub> (W)	V <sub>f</sub> (V)	P <sub>el</sub> (W)	V <sub>f</sub> (V)
VCA2-123	6.7	33.7	8.6	34.3	10.4	34.7

Voltage and power tolerance: ± 10%

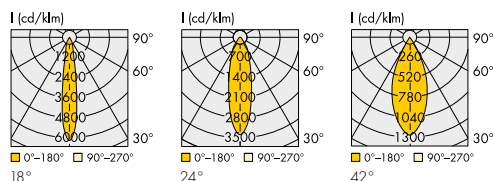

Type	Ref. No.	Colour	Correlated colour temp. K	Typ. luminous flux and efficiency at						Light intensity at max. current Candela	Beam angle °	CRI R <sub>a</sub>
				200 mA		250 mA		300 mA				
				lm	lm/W	lm	lm/W	lm	lm/W			
<b>Warm white – 2700 K</b>												
Active VCA2-123 PLUS 927	572350	warm white	2700	785	117	965	112	1140	110	6780	18	92
Active VCA2-123 PLUS 927	572351	warm white	2700	775	116	950	110	1125	108	3850	24	92
Active VCA2-123 PLUS 927	572352	warm white	2700	785	117	965	112	1140	110	1410	42	92
<b>Warm white – 3000 K</b>												
Active VCA2-123 PLUS 930	572353	warm white	3000	840	125	1025	119	1215	117	7230	18	92
Active VCA2-123 PLUS 930	572354	warm white	3000	830	124	1015	118	1200	115	4110	24	92
Active VCA2-123 PLUS 930	572167	warm white	3000	840	125	1025	119	1215	117	1500	42	92
<b>Neutral white – 4000 K</b>												
Active VCA2-123 PLUS 940	572355	neutral white	4000	860	128	1055	123	1250	120	7430	18	92
Active VCA2-123 PLUS 940	572356	neutral white	4000	850	127	1045	122	1235	119	4230	24	92
Active VCA2-123 PLUS 940	572357	neutral white	4000	860	128	1055	123	1250	120	1540	42	92


Production tolerance of luminous flux and efficiency: ± 10%

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

## Active VCA2-123 PLUS – up to 200 mA

### Technical notes


Reflector: Ø 50 mm, heat sink material: aluminium  
 Lumen maintenance: L80/B10; 50,000 hrs. 75 °C at  $t_p$  point  
 Max. operating temperature at  $t_c$  point: 90 °C  
 Temperature depends on installation situation and has to be checked by the luminaire manufacturer.  
 Colour accuracy initially: 3 SDCM  
 Plastic clear cover to protect reflector (opaque cover on request)  
 Leads: Cu tinned, stranded conductors 0.5 mm<sup>2</sup>, length: 200 mm, stripped lead ends (with plug on request)  
 With integrated cord grip  
 Packaging unit: 45 pcs.

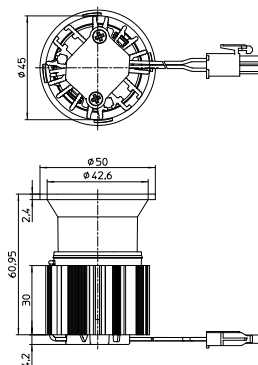

### Electrical characteristics

Type	150 mA		200 mA	
	P <sub>el</sub> (W)	V <sub>f</sub> (V)	P <sub>el</sub> (W)	V <sub>f</sub> (V)
VCA2-123	4.95	33.0	6.74	33.7

Voltage and power tolerance: ± 10%

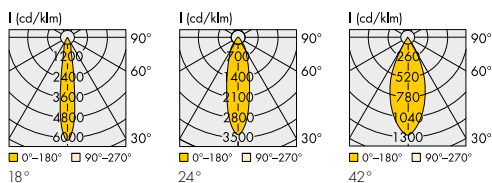

Type	Ref. No.	Colour	Correlated colour temp. K	Typ. luminous flux and efficiency at				Light intensity at max. current Candela	Beam angle °	CRI R <sub>a</sub>
				150 mA lm	150 mA lm/W	200 mA lm	200 mA lm/W			
<b>Warm white – 2700 K</b>										
Active VCA2-123 PLUS 927K	<b>573043</b>	warm white	2700	605	122	785	116	4670	18	92
Active VCA2-123 PLUS 927K	<b>573044</b>	warm white	2700	600	121	780	116	2670	24	92
Active VCA2-123 PLUS 927K	<b>573045</b>	warm white	2700	605	122	785	116	970	42	92
<b>Warm white – 3000 K</b>										
Active VCA2-123 PLUS 930K	<b>573046</b>	warm white	3000	645	130	840	125	5000	18	92
Active VCA2-123 PLUS 930K	<b>573047</b>	warm white	3000	635	128	830	123	2840	24	92
Active VCA2-123 PLUS 930K	<b>573048</b>	warm white	3000	645	130	840	125	1040	42	92
<b>Neutral white – 4000 K</b>										
Active VCA2-123 PLUS 940K	<b>573049</b>	neutral white	4000	665	134	865	128	5140	18	92
Active VCA2-123 PLUS 940K	<b>573050</b>	neutral white	4000	660	133	855	127	2930	24	92
Active VCA2-123 PLUS 940K	<b>573051</b>	neutral white	4000	665	134	865	129	1070	42	92


Production tolerance of luminous flux and efficiency: ± 10%

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

## Active VCA2-123 – up to 150 mA

### Technical notes

Reflector: Ø 50 mm, heat sink material: thermoconductive resin  
 Lumen maintenance: L80/B10; 50,000 hrs. 75 °C at  $t_p$  point  
 Max. operating temperature at  $t_c$  point: 90 °C  
 Temperature depends on installation situation and has to be checked by the luminaire manufacturer.  
 Colour accuracy initially: 3 SDCM  
 Plastic clear cover to protect reflector (opaque cover on request)  
 Leads: Cu tinned, stranded conductors 0.5 mm<sup>2</sup>, length: 200 mm, stripped lead ends (with plug on request)  
 With integrated cord grip  
 Packaging unit: 45 pcs.

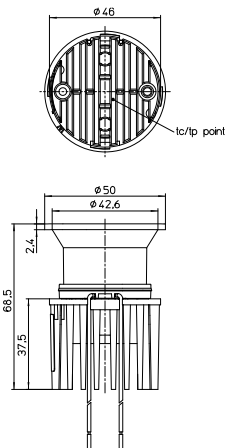


up to 150 mA

### Electrical characteristics

Type	150 mA	
	P <sub>el</sub> (W)	V <sub>f</sub> (V)
VCA2-123	4.95	33.0

Voltage and power tolerance: ± 10%

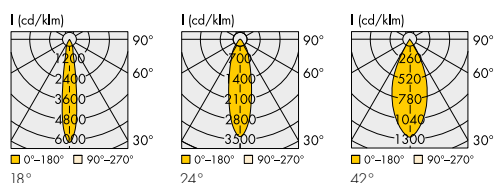

Type	Ref. No.	Colour	Correlated colour temp. K	Typ. luminous flux and efficiency at 150 mA		Light intensity at max. current Candela	Beam angle °	CRI R <sub>a</sub>
				lm	lm/W			
<b>Warm white – 2700 K</b>								
Active VCA2-123 PLUS 927K	<b>573034</b>	warm white	2700	605	122	3600	16	92
Active VCA2-123 PLUS 927K	<b>573035</b>	warm white	2700	600	121	2050	24	92
Active VCA2-123 PLUS 927K	<b>573036</b>	warm white	2700	605	122	750	40	92
<b>Warm white – 3000 K</b>								
Active VCA2-123 PLUS 930K	<b>573037</b>	warm white	3000	645	130	3840	16	92
Active VCA2-123 PLUS 930K	<b>573038</b>	warm white	3000	635	128	2170	24	92
Active VCA2-123 PLUS 930K	<b>573039</b>	warm white	3000	645	130	800	40	92
<b>Neutral white – 4000 K</b>								
Active VCA2-123 PLUS 940K	<b>573040</b>	neutral white	4000	665	134	3960	16	92
Active VCA2-123 PLUS 940K	<b>573041</b>	neutral white	4000	660	133	2260	24	92
Active VCA2-123 PLUS 940K	<b>573042</b>	neutral white	4000	665	134	820	40	92

Production tolerance of luminous flux and efficiency: ± 10%

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

# Active Halo PLUS

## Dim2Warm

### Technical notes

Reflector: Ø 50 mm

Heat sink material: aluminium

Lumen maintenance: L70/B10; 30,000 hrs. 65 °C (350 mA)  
at  $t_p$  point

Max. operating temperature at  $t_c$  point: 75 °C at 350 mA

Temperature depends on installation situation and has to be checked by the luminaire manufacturer.

Colour accuracy initially: 3 SDCM


Plastic frost cover to protect reflector

Leads: Cu tinned, stranded conductors 0.5 mm<sup>2</sup>,  
length: 200 mm, with plug

With integrated cord grip

Weight: 150 g


Packaging unit: 28 pcs.

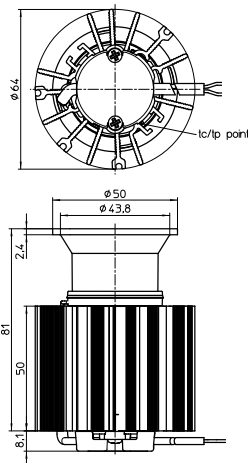

### Electrical characteristics

Type	50 mA		350 mA	
	P <sub>el</sub> (W)	V <sub>i</sub> (V)	P <sub>el</sub> (W)	V <sub>i</sub> (V)
Active HALO	1.6	31.4	12.9	37

Voltage and power tolerance: ± 10%

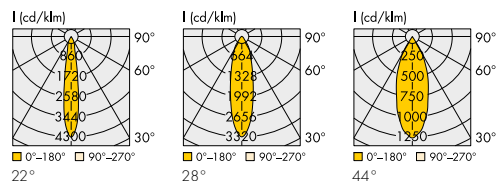

Type	Ref. No.	Colour	Correlated colour temp. K	Typ. luminous flux and colour temperature at				Light intensity at max. current Candela	Beam angle °	CRI R <sub>a</sub>
				50 mA		350 mA				
				lm	K	lm	K			
<b>ActiveLine HALO – Warm white</b>										
Active HALO PLUS	<b>571448</b>	warm white	3000 → 2000	115	2000	1040	3000	3350	22	90
Active HALO PLUS	<b>571449</b>	warm white	3000 → 2000	110	2000	1030	3000	2530	28	90
Active HALO PLUS	<b>571450</b>	warm white	3000 → 2000	110	2000	1030	3000	1600	44	90

Production tolerance of luminous flux: ± 10%

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

# LED Engines for Active PLUS and Evolve 50

**LEDSpot engine equipped with LED module, holder, thermal pad, heat sink and leads but without reflector or lenses**

### Technical notes

For reflectors PLUS and lenses Evolve

Optics fixation: click-in

Heat sink material: aluminium/thermoconductive resin

Lumen maintenance:

L80/B10

50,000 hrs. at max. allowed operation current and

75 °C at  $t_p$  point

Temperature depends on installation situation and has to be checked by the luminaire manufacturer.

Colour accuracy initially: 3 SDCM

Leads: Cu tinned, stranded conductors 0.5 mm<sup>2</sup>,

length: 200 mm, stripped lead ends (with plug on request)

With integrated cord grip

Packaging unit: see page 10




### Maximum ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the modules.


Type	Ambient temperature range (T <sub>a</sub> )		Operation temp. at t <sub>c</sub> point with max. current		Storage temperature range		Max. allowed repetitive peak current mA
	°C min.	°C max.	°C min.	°C max.	°C min.	°C max.	
Engine/Active VCA2-123	-20	+45	-25	+80	-40	+90	600

Temperatures depend on installation situation and has to be checked by the luminaire manufacturer.


### A – Engine 350 mA

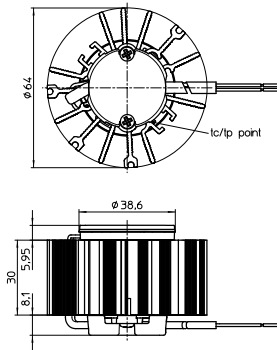


### B – Engine 300 mA

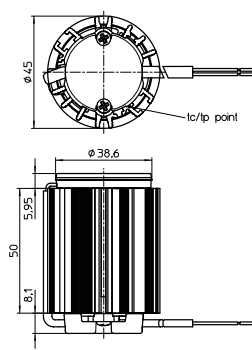


### C – Engine 200 mA



### D – Engine 150 mA

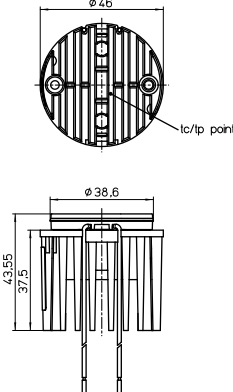

### E – Engine Halo

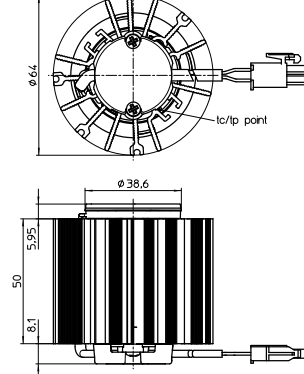

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

## LED Engines for Active PLUS and Evolve 50

### Electrical characteristics

Type	Voltage DC (V)					Power consumption (W)				
	150 mA typ.	200 mA typ.	250 mA typ.	300 mA typ.	350 mA min.	150 mA typ.	200 mA typ.	250 mA typ.	300 mA typ.	350 mA min.
Engine/Active VCA2-123	33.0	33.7	34.3	34.7	35.2	5.0	6.7	8.6	10.4	12.3
Engine Halo	33.4	34.3	35.9	36.4	37.0	5.0	7.0	8.9	10.9	12.9

Voltage and power tolerance: ± 10%

### Optical characteristics

at  $t_p$  70 °C

Type	Ref. No.	Colour	Correlated colour temperature K	Typ. luminous flux and efficiency at						CRI
				250 mA		300 mA		350 mA		
				lm	lm/W	lm	lm/W	lm	lm/W	$R_a$
<b>Engines up to 350mA - Drawing A</b>				Pel=8.6W/Vf=34.3V		Pel=10.4W/Vf=34.7V		Pel=12.3W/Vf=35.2V		
Engine VCA2-123 927	<b>572242</b>	warm white	2700	1095	127	1295	125	1470	120	92
Engine VCA2-123 930	<b>572288</b>	warm white	3000	1165	135	1380	133	1565	127	92
Engine VCA2-123 940	<b>572289</b>	neutral white	4000	1200	140	1420	137	1610	131	92

Production tolerance of luminous flux and efficiency: ± 10%

Type	Ref. No.	Colour	Correlated colour temperature K	Typ. luminous flux and efficiency at						CRI
				200 mA		250 mA		300 mA		
				lm	lm/W	lm	lm/W	lm	lm/W	$R_a$
<b>Engines up to 300mA - Drawing B</b>				Pel=6.7W/Vf=33.7V		Pel=8.6W/Vf=34.3V		Pel=10.4W/Vf=34.7V		
Engine VCA2-123 927	<b>572286</b>	warm white	2700	890	133	1095	127	1295	125	92
Engine VCA2-123 930	<b>572166</b>	warm white	3000	955	143	1165	135	1380	133	92
Engine VCA2-123 940	<b>572287</b>	neutral white	4000	980	146	1200	140	1420	137	92

Production tolerance of luminous flux and efficiency: ± 10%

Type	Ref. No.	Colour	Correlated colour temperature K	Typ. luminous flux and efficiency at				CRI
				150 mA		200 mA		
				lm	lm/W	lm	lm/W	$R_a$
<b>Engines up to 200mA - Drawing C</b>				Pel=5.0W/Vf=33.0V		Pel=6.7W/Vf=33.7V		
Engine VCA2-123 927	<b>572480</b>	warm white	2700	695	139	890	133	92
Engine VCA2-123 930	<b>571577</b>	warm white	3000	740	148	955	143	92
Engine VCA2-123 940	<b>572481</b>	neutral white	4000	760	152	980	146	92

Production tolerance of luminous flux and efficiency: ± 10%

Type	Ref. No.	Colour	Correlated colour temperature K	Typ. luminous flux and efficiency at		CRI
				200 mA		
				lm	lm/W	$R_a$
<b>Engines up to 150mA - Drawing D</b>				Pel=5.0W/Vf=33.0V		
Engine VCA2-123 927	<b>572814</b>	warm white	2700	695	139	92
Engine VCA2-123 930	<b>572815</b>	warm white	3000	740	148	92
Engine VCA2-123 940	<b>572816</b>	neutral white	4000	760	152	92

Production tolerance of luminous flux and efficiency: ± 10%

Type	Ref. No.		Colour	Correlated colour temperature K	Typ. luminous flux and colour temperature at				CRI
	without connector	with connector			50 mA		350 mA		
				lm	K	lm	K	$R_a$	
<b>LEDspot Engine Halo - Drawing E</b>									
Engine Halo 350mA	<b>569772</b>	<b>569773</b>	warm white	3000 -> 2000	130	2000	1200	3000	90

Production tolerance of luminous flux and efficiency: ± 10%


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.




## Reflectors PLUS for LED Engines

### Technical notes

For click-in fixation on holders Easy  
Diameter: 50 mm  
Material: PC  
Operating temperature: -25 to 90 °C  
Storage temperature: -40 to 90 °C




Ref. No.	For LED modules	Beam angle (°)	Cover	Optical efficiency (%)	Weight g
603685	VCA2-123,	18	Clear	87	10
603687	VCA2-123,	24	Clear	86	10
604919	VCA2-123,	42	Clear	87	10
603686	VCA2-123, Halo	20	Frost	86	10
603688	VCA2-123, Halo	26	Frost	85	10
604920	VCA2-123, Halo	45	Frost	85	10

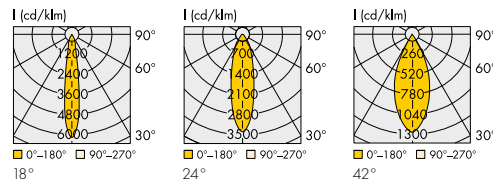


## Optics Evolve 50 for LED Engines

### Technical notes

For click-in fixation on holders Easy  
Diameter: 50 mm  
Material: PC  
Operating temperature: -25 to 90 °C  
Storage temperature: -40 to 90 °C



Ref. No.	For LED modules	Beam angle (°)	Cover	Optical efficiency (%)	Weight g
603672	VCA2-123	16	—	87	15
603673	VCA2-123	26	—	86	15
603674	VCA2-123	34	—	89	15
604879	VCA2-123	60	—	86	15

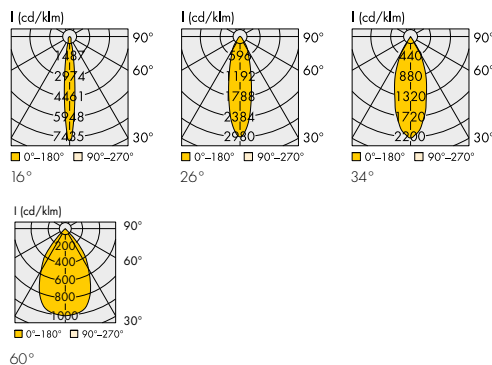


\* In addition with mixing chamber

### \* Mixing Chamber for Halo

Material: PC  
Fixation: click-in


Ref. No.: 604024



### Flange Evolve

To reduce light leakage (optional)  
Material: PBT, black

Ref. No.: 603681



The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

## LEDspots Active PLUS

### General information

Performance acc. to IEC 62717:  $t_p = 85^\circ\text{C}$ ; 100,000 hrs.

### Packaging unit

Type	Packaging unit pcs.	Box dimensions (LxWxH) mm	Weight single (g)	Gross weight packaging unit (g)
Engine - 350mA	28	600x400x90	110	3480
Engine - 300mA	45	600x400x80	100	4900
Engine - 200mA	90	600x400x80	80	7600
Engine - 150mA	90	600x400x80	100	7500
Engine HALO	28	600x400x90	140	4320
Reflector PLUS	30	370x290x35	10-	700
Lenses Evolve 50	30	370x290x35	15	850
Active PLUS - 350mA	28	600x400x90	120	3280
Active PLUS - 300mA	45	600x400x105	110	5350
Active PLUS - 200mA	45	600x400x80	90	4450
Active PLUS - 150mA	45	600x400x105	110	5350
Active PLUS HALO	28	600x400x105	150	4000

### EPREL information

Engine & Active PLUS VCA2-123 are a containing product of LED modules:

VS Type: VCA2-123-927; VCA2-123-930; VCA2-123-940

### Light Source

Containing product	Light Source	EPREL Regi. No.	EE Class
ReadyLine C07-E	Type		
Engine VCA2-123 927	VCA2-123-927	857254	E
Active VCA2-123 PLUS 927	VCA2-123-927	857254	E
Engine VCA2-123 930	VCA2-123-930	857255	E
Active VCA2-123 PLUS 930	VCA2-123-930	857255	E
Engine VCA2-123 940	VCA2-123-940	857258	E
Active VCA2-123 PLUS 940	VCA2-123-940	857258	E
HALO	WU-M-618	901672	F




### General safety and installation instructions

- VS product may only be installed and commissioned by authorised and fully qualified staff.
- These instructions must be carefully read before installing and commissioning the system, as this is the only way to ensure safe and correct handling.
- An external constant-current driver is required.
- Before any work is carried out on the equipment, it must be disconnected from the mains.
- All valid safety and accident-prevention regulations must be observed.
- The products should never be in expertly opened. Repairs may only be undertaken by the manufacturer.

### Built-in

### Correct position

OK

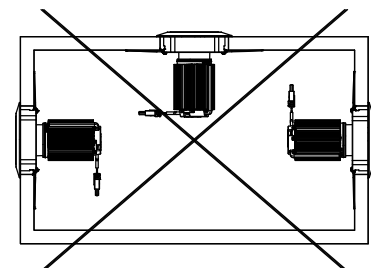

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

### Product guarantee

- 5 years
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage ([www.vossloh-schwabe.com](http://www.vossloh-schwabe.com)). We will be happy to send you these conditions upon request.

## LED Constant Current Drivers

Please visit our homepage for details for suitable

LED constant current drivers:  
[www.vossloh-schwabe.com](http://www.vossloh-schwabe.com)

## Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. The LED modules are designed for operation within a casing or luminaire. Safety regulations acc. to EN 60598 has to be observed. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains).

- Mains frequency: 0 Hz
- LED built-in modules must not be subjected to any undue mechanical stress, e. g.:
  - handle LED modules carefully
  - avoid shear and compressive forces onto the optics during handling and installation
  - do not carry or move the LED engines by using the wires
- When installing/screwing the module into a luminaire, please ensure that the cables are not squeezed between luminaire and LED engine.
- The LED engine must not be used in hermetically sealed casings.
- Safe operation only possible by the use of external constant current sources ( $I_{max}$ , see table "Electrical Characteristics").
- Operation is dependent on constant current drivers that should provide the following protective measures:
  - short-circuit protection
  - overload protection
  - overheating protection
  - SELV;  $U_{max} \leq 60 V$
  - $I_{max}$  must not be exceeded
- Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- The maximum output of the power supply must be observed.
- For optimal load of used constant current driver the modules can only be connected in series. The quantity of LED modules is limited by the sum of forward voltage and the capacity of used constant current driver. Safety regulations acc. to EN 60598 has to be observed if the sum of forward voltage exceed the permitted touchable value.
- A parallel connection of the LED engines is not allowed.
- Measurement tolerances:
  - luminous flux:  $\pm 10 \%$
  - voltage:  $\pm 3 \%$
  - CRI:  $\pm 1 \%$
- Maximum allowed number of switching cycles: 15,000
- Please ensure standard ESD (electrostatic discharge) protection measures are employed when handling and installing LED modules. Electrostatic discharge can damage LEDs.
- To ensure problem-free operation, the specified maximum temperature at the  $t_c$  and  $t_p$  point (see "Operating Life") must be observed (measured in accordance with EN 60598-1). To satisfy this point, it is necessary to put measures in place to ensure any heat is dissipated from the LED engine to the environment.

- To ensure good thermal behaviour take care about "general safety and installation instructions".
- In the event of outdoor applications or applications in damp locations, care must be taken to protect LED assembly modules against humidity, splashes and jets of water. Any corrosion damage resulting from humidity or contact with condensation will not be recognised as a defect or manufacturing fault. LED assembly modules are not specially protected against foreign bodies or dust. Depending on the type of application, further protection must be ensured to prevent dust and foreign bodies from entering.
- Operating LED modules in the presence of certain chemical substances or in chemically enriched (aggressive) environments can impair module functionality or even cause total module failure. Detailed information can be found in our "Chemical Incompatibility" PDF on our website [www.vossloh-schwabe.com](http://www.vossloh-schwabe.com)
- The photobiological safety of the LED modules must be classified into risk groups in accordance with EN 62471  
Rating in accordance with IEC / TR 62778

The following LED modules are in risk group 1:  
Up to 4000 K

LED module type	Max. allowed luminous flux per module (lm)	For higher luminous flux: E threshold to RG1 (lx)
VCA2-123	1692	1464

### Applied Standards

EN 62031  
LED modules for general lighting – Safety specifications

EN 62471-2  
Photobiological safety of lamps and lamp systems

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.