



NEW PRODUCT NEWS

MARCH '20 | [WEB VERSION](#)

LED-Module – LED Roadway Light P-Class Silicone

These LED modules are suitable for standard-compliant street, pathway and public square lighting. In addition to versions with Area and M-Class optics, these compact LED modules are now also available with P-Class optics (in acc. with EN 13201).

[LED Roadway Light P-Class](#)



LED-Module – Horticulture Light SYM II

Based on the product range for street and high-bay lighting, the WU-M-515 Horticulture module is characterised by its high-quality finish and excellent lighting properties. The IP69/KO8 degree of protection of the VS secondary silicone optics makes the LED module ideal for greenhouse lighting.

- Self-cooling for passive cooling concepts
- Preamsembled, reinforced and insulated leads with cord grips for protection class II luminaires
- High degree of spectral design flexibility at high efficiencies: up to 80 µmol/s or 3.6 µmol/J

[LED Horticulture Light SYM II](#)



LED Modules – LED Linear Allround 5050

- Built-in module for modular luminaire setup
- Four versions: 4, 8, 12 or 16 LEDs
- 3 light temperatures: 3,000 / 4,000 / 5,000 K
- Highly efficient: up to 184 lm/W
- Zhaga-compliant dimensions (in acc. with Book 15)
- ENEC- and VDE-tested (in acc. with EN 62031)

[LED Linear Allround 5050](#)



LED Linear Allround 5050 – 2x6

- Variant for 2x6 rectangular IP optics
- Zhaga-compliant dimensions (in acc. with Book 19)



[LED Linear Allround 5050 – 2x6](#)



Compact LED Drivers for Industry and Street Lighting

ComfortLine NFC / LEDSet S-D

- Output current can be selected via NFC or LEDSet
- MidNight function
- Overvoltage protection: up to 10 kV
- Long service life: up to 100,000 hours / 5-year product warranty

[ComfortLine NFC/LEDSet S-D](#)



PrimeLine NFC / LEDSet S-MD

- DALI2, Line Switch (output reduction via control phase), MidNight function, Mains Voltage Dimming (dimming via mains voltage amplitude)
- Overvoltage protection: up to 10 kV
- Long service life: up to 100,000 hours / 5-year product warranty

[PrimeLine NFC/LEDSet S-MD](#)



LED FlatPanel ComfortLine

This FlatPanel LED module is the perfect choice for both new and existing lighting installations since it can be optimally integrated into existing infrastructures.

- Flat, square light panel for false ceiling or pendant installation
- Optionally available with an external, already connected LED driver or without control gear
- Highly efficient: up to 120 lm/W
- Standard, IP54, UGR19 and TPa versions available
- High CRI (colour rendering index): ≥ 80
- ENEC- and DEKRA-tested
- 5-year product warranty

[LED FlatPanel ComfortLine](#)



LED Compact High-bay

This LED Compact High-bay module is a compact industry solution with an integrated LED driver that makes it easy to convert high-bay lighting to LED.

- Incl. integrated LED driver
- Highly efficient: up to 160 lm/W
- High CRI (colour rendering index): ≥ 80
- With power supply plugs and through-wiring, incl. plug protectors and ceiling brackets with screws
- 5-year product warranty

[LED Compact High-bay](#)



LED Linear Waterproof

This linear luminaire for wet rooms is available in two lengths (1200 mm and 1500 mm) and as a through-wired variant as well as in two performance classes (ComfortLine and Primeline).

- UV-resistant casing
- Highly efficient: up to 138 lm/W
- High CRI (colour rendering index): ≥ 80
- Degree of protection: IP66
- Resistance to mechanical impact: IK08
- Fire resistance: V2 (UL94)
- Glow wire test: 850 °C
- Simple installation, including metal brackets, screws and hooks for wall or pendant installation
- 5-year product warranty

[LED Linear Waterproof](#)




Product Finder is online

Use Vossloh-Schwabe's clearly structured new Product Finder for targeted searches of technical details and find the product you want in no time.

Try it out for yourself!

<https://www.vossloh-schwabe.com/en/products/productfilter/>

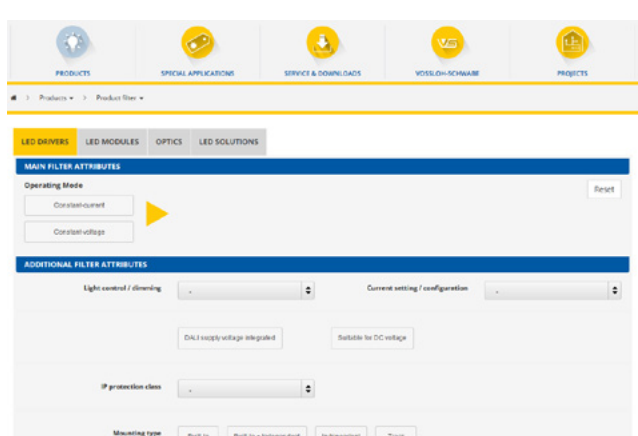

For more information, please follow the links or simply give us a call. We'll be glad to help you.

Your

VS Sales Team